


PART NUMBER: F501SXC000

Second Row Sunshade- 2019 Ascent



VERSION	DATE	SUBARU OF AMERICA	PAGE
initial	3/27/2018	SUBARU OF AIVIERICA	1/6

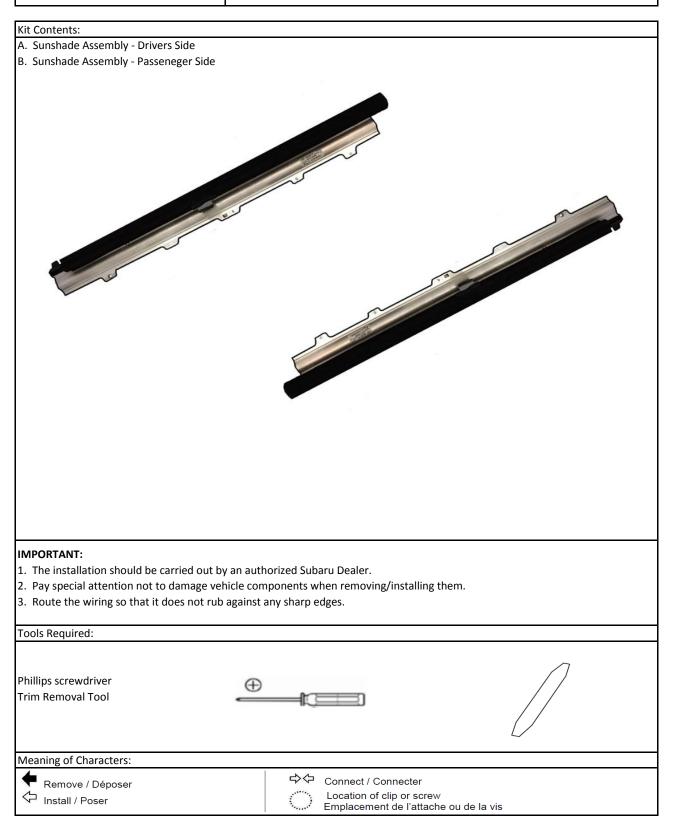

INSTRUCTIONS D'INSTALLATION INSTRUCTIONS D'INSTALLATION

PART NUMBER:

Second Row Sunshade

1: Disconnect Battery.

To remove the door panel start by using the trim removal tool to pop open the plastic cover and remove the screw that is behind the door latch.





2: Remove the cover and screw that is located in the handle of the door



3: Use your fingers to pry on the top side of this plastic panel and pull it off (Note the clip locations)




VERSION	DATE	SUBARU OF AMERICA	PAGE
initial	3/27/2018	30BARO OF AMILKICA	2/6



Second Row Sunshade

4: Pull on door trim by grabbing recess area along inside of door.



5: Grab the panel and pull out and lift up gently to release the door panel from the door



6: First remove the door latch and door lock cables





VERSION	DATE	SUBARU OF AMERICA	PAGE
initial	3/27/2018	SUBARU OF AMERICA	3/6



Second Row Sunshade

7: Unplug the connector that plugs into the door



8: Unplug the connector located on the door panel



9: Place the door panel on a soft flat working surface




VERSION	DATE	SUBARU OF AMERICA	PAGE
initial	3/27/2018	SUBARU OF AMERICA	4/6



Second Row Sunshade

10: Remove the 7 screws holding the trim piece on

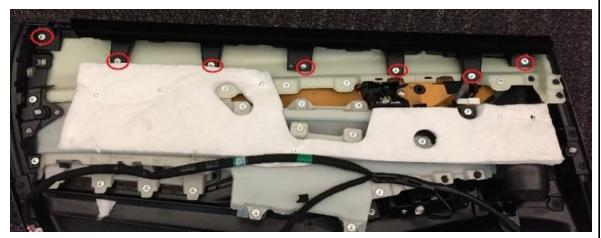

11: Undo the 7 clips holding the trim panel on by gently releasing the clip and pulling up on the trim.



12: Completely remove the trim

and discard.



ĺ	VERSION	DATE	SUBARU OF AMERICA	PAGE
ĺ	initial	3/27/2018	SUBARU OF AMERICA	5/6



Second Row Sunshade

13: Place sunshade assembly in the door panel. Re-install the previously removed 7 screws. (Note the pull tab needs to be placed over the door panel, as shown)

Torque screws to 5 in-lbs.





14: Follow same steps in reverse order to reinstall door trim back on to door. Repeat install for opposite side.

Note: When placing door panel back on door, make sure windows are down.




VERSION	DATE	SUBARU OF AMERICA	PAGE
initial	3/27/2018	SUBARU OF AMERICA	6/6



NUMÉRO DE PIÈCE : F501SXC000

Écran solaire de la deuxième rangée – Ascent 2019

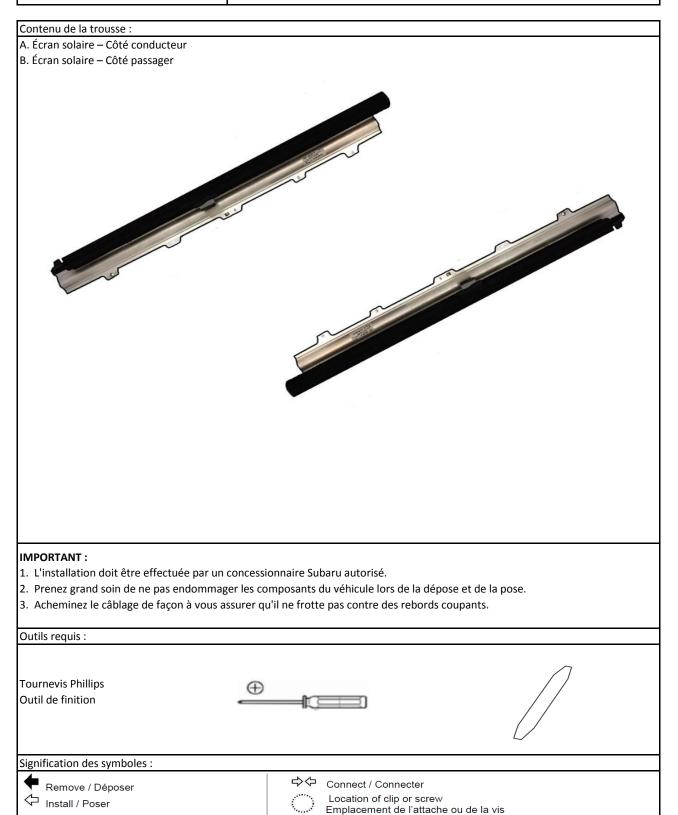

VERSION	DATE	SUBARU OF AMERICA	PAGE
Initiale	3/27/2018	SUBARU OF AIVIERICA	7 de 12



Écran solaire de la deuxième rangée

1 : Déconnectez la batterie.

Pour retirer le panneau de porte, utilisez un outil de dépose de garniture pour ouvrir le couvercle en plastique et retirez la vis derrière le verrou de la porte.





2 : Retirer le couvercle et la vis située dans la poignée de la porte.



3 : Utilisez vos doigts pour soulever la partie supérieure du panneau en plastique et le retirer (prenez note des emplacements des attaches).



VERSION	DATE	SUBARU OF AMERICA	PAGE
Initiale	3/27/2018	SUBARU OF AIVIERICA	8/12



Écran solaire de la deuxième rangée

4 : Tirez sur la garniture de porte en agrippant les renfoncements le long de la porte.



5 : Prenez le panneau et tirez-le vers l'avant et vers le haut délicatement pour dégager le panneau de la porte.



6 : Retirez d'abord le verrou de porte ainsi que les câbles du mécanisme de verrouillage de la porte.





VERSION	DATE	SUBARU OF AMERICA	PAGE
Initiale	3/27/2018	SUBARU OF AIVIERICA	9/12



Écran solaire de la deuxième rangée

7 : Débranchez le connecteur branché à la porte.



8 : Débranchez le connecteur situé sur le panneau de la porte.



9 : Placez le panneau de la porte à plat sur une surface de travail douce.




VERSION	DATE	SUBARU OF AMERICA	PAGE
Initiale	3/27/2018	SUBARU OF AMERICA	10/12




Écran solaire de la deuxième rangée

10 : Retirez les sept vis tenant la garniture en place.

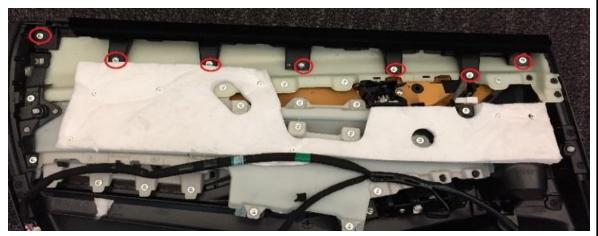

11 : Détachez les sept attaches maintenant le panneau de garniture en place en dégageant délicatement les attaches et tirant sur la garniture.

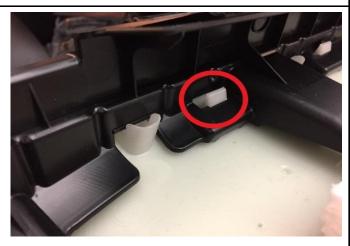

12 : Retirez complètement la garniture et mettez-la au rebut.



VERSION	DATE	SUBARU OF AMERICA	PAGE
Initiale	3/27/2018	SUBARU OF AIVIERICA	11/12



Écran solaire de la deuxième rangée

13 : Placez l'écran solaire dans le panneau de porte. Reposez les sept vis retirées précédemment. (Prenez note que les languettes de tirage doivent être placées sur le panneau de porte, comme illustré)

Serrez les vis à 5 po-lb.





14 : Suivez les étapes dans l'ordre inverse pour réinstaller la garniture de la porte. Répétez l'installation pour le côté opposé.

Remarque: Lorsque vous placez le panneau de porte sur la porte, assurez-vous que les fenêtres sont fermées.



VERSION	DATE	SUBARU OF AMERICA	PAGE
Initiale	3/27/2018	SUBARU OF AMERICA	12/12